

LED SHOP LIGHT



Linkable LED Lighting

Linkable led shop lights feature shatterproof housing with aluminum heat sink to replace traditional fluorescent fixtures, typically used in garages, shops, workshops, etc.



Quick Wiring
Connection



High Efficacy
140 LPW



CCT & Wattage
Selectable



Impact Rated
IK08



IP65 Rating
Waterproof

FEATURE

Style	Tri-proof
Housing	Pure aluminum
Diffuser	PC, Shatter-Proof, Frosty/Clear Strip
Waterproof	IP65
Lumen Efficacy	120 LPW (Frosty)-140 LPW (Clear)
Sensor	Microwave motion/photocell
Beam Angle	120 deg.
Installation	Quick Connector
Emergency Backup Available	UL924, CEC Title-20
Warranty	5 Years
Listed	ETL/cETL, CE, RoHS

SPECIFICATION

Model#	Input Voltage	Power	Light Efficacy	CCT	Beam Angle	CRI	Length
LT-TPL220	100-277VAC	20W	140 LPW-160 LPW	2700K-6500K	120	80	2'
LT-TPL440	100-277VAC	40w	140 LPW-160 LPW	2700K-6500K	120	80	4'
LT-TPL450	100-277VAC	50W	140 LPW-160 LPW	2700K-6500K	120	80	4'
LT-TPL560	100-277VAC	60W	140 LPW-160 LPW	2700K-6500K	120	80	5'

CERTIFICATE




Quick Wiring Linkable Connection

The linkable installation can save additional labor costs to reduce your electricity bill.



Battery Option Intelligent Detection

Provide backup lighting to get people out of your building in an emergency.

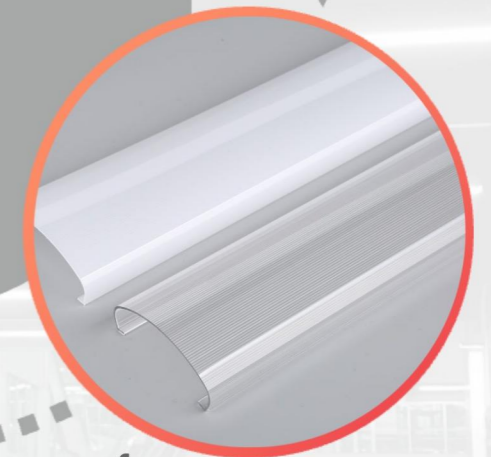

Shatter-proof Cover Option

There are clear strip and frosty covers for your choice.

ORDER INFO.

Com.	Series	Size	Power	Input Voltage	CCT	Control	Duration (EM)	Cover
LT	TPL	2	20=20W	Std.=100-277vac	27K=2700K	DM=1-10DC Dim	Std.= 90 min.	F= Frosty
		4	40=40W	HV= 200-480VAC	30K=3000K	DA= Dali Dim	2H= 120 min.	C=Clear
			50=50W	EV=200-240VAC	40K=4000K	EM=Emergency Kit	3H= 180 min.	
		5	60=60W		50K=5000K	PC=Photocell		
					57K=5700K	MS=Motion Sensor		